


ROLLER VALVE ROD GUIDES

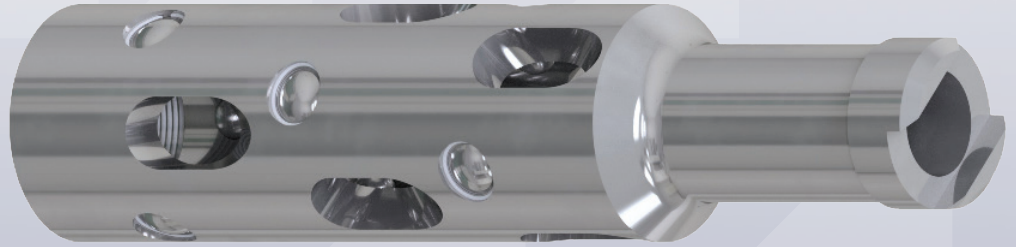

Slick Tools International has developed the Roller Valve Rod Guide to help centralize valve rod movement within the guide. It incorporates friction reducers to centralize the rod and allows rotation and ease of travel. While reducing the friction in all planes, additional benefits include reduction in drag and torque on the valve rod and pumping system. The friction reducers allow the rod to maneuver away from the actual guide body, thus assist in protecting the throat and fishing neck of the guide. This helps reduce potential strain and wear on the surface and downhole components, including the sucker rods, the pump, and the tubing. Allow Slick Tools International to help you pump further, safer, and more efficient.

Drilling Tools International
Slick Tools International
3701 Briarpark Dr • Ste 150
Houston, TX 77042
832.742.8500

Slick Tools International
Shipping and Receiving
10645 Richmond Ave • Ste 140
Houston, TX 77042
888.699.3035

Other Drilling Tools International Centers:

Houston, TX • 281.645.2010

Broussard, LA • 337.856.0333

Midland, TX • 432.563.0676

Odessa, TX • 432.248.8350

New Iberia, LA • 337.256.5848

Oklahoma City, OK • 405.604.2763

Bakersfield, CA • 661.869.1752

Casper, WY • 307.237.5248

Charleroi, PA • 724.565.5682

Watford City, ND • 701.482.6500

Nisku, Canada • 877.570.1962

Dubai, UAE

Corporate

3701 Briarpark Dr • Ste 150
Houston, TX 77042
832.742.8500

Benefits

- Robust design to withstand operations and loads
- Standard and API connections
- Friction reduction system to reduce friction in all planes
- Maneuverability to help maintain momentum and ease of movement
- Minimal decrease in ID to allow flow of fluid and debris
- Can be customized for sour service environments
- Can be customized with various configurations, material, threads, and dimensions
- Average friction coefficient of 0.050 per tool

Applications

Rod Lifting wells
Vertical and Horizontal pumping

| TECHNICAL DATA | 2.875" (G11-25) | 3.500" (G11-30) |
|--------------------------|---------------------------|-----------------------------|
| OD @ body | 2.250" | 2.750" |
| ID of guide | 1.000" | 1.188" |
| ID @ friction reducers | 0.9125" | 1.100" |
| Lower threads (standard) | 1.8024" 14 UN-2B (box) | 2.1095" 11.5 UN-2B (box) |
| Top of guide fishing sub | 1.625" | 1.625" |
| Fishing neck | 1.50" | 1.50" |
| Length | 10.50" | 11.00" |

Patent Pending

www.drillingtools.com

Drilling Tools International, Inc. is a leading provider of downhole tools to the land and offshore drilling markets. For more than 30 years our company has been guided by the principals of Strength, Innovation and Performance. We consistently deliver world class customer service while providing quality products that meet the demanding drilling applications of today's market.

Our Quality Management System is certified in compliance to ISO 9001, and API Spec Q1 and our manufacturing is licensed to API Spec 7-1. Our Quality Management System governs all of our processes from planning, to process control, to delivery. This ensures that we consistently manufacture products that not only meet API standards but also meet the ever-changing needs of our customers.